

## spectraVal 1511

### Stand alone VIS Spectroradiometer

**spectraVal 1511** is a compact spectroradiometer for the visible wavelength range. It has a display and can be used for spectral Radiance measurement with a measuring angle of  $1.8^\circ$ . The actual measuring area is marked by a red circle.

**spectraVal 1511** can be operated in stand alone mode (using the display program) or in connection with a computer (using the included software JETI LiVal or special programs for monitor calibration as CalMAN, LightSpace CMS, ChromaPure).

#### Advantages:



- Compact solutions
- Fast measurement
- Precise results due to high quality spectrograph and NIST traceable calibration
- Comfortable handling due to Bluetooth connection

#### Examples for applications:

- Calibration of broadcast monitors
- Color adjustment of digital projectors
- spectraVal 1511HiRes for RGB Laser projectors
- Measurement of LED displays

**spectraVal 1511 displays the following measuring values:**

- Luminance, Radiance
- $x$  and  $y$  coordinates, RGB values
- Dominate wavelength, color purity
- Correlated Color Temperature
- Color Rendering Index
- Radiometric spectrum

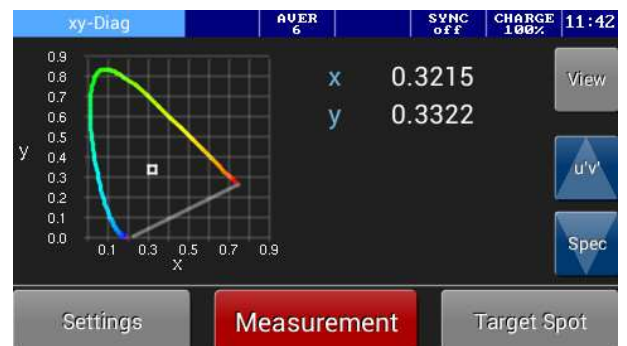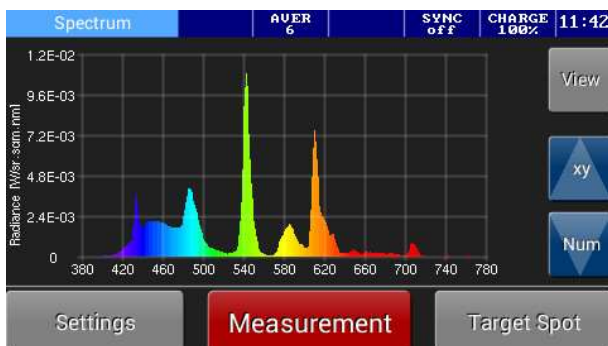

More quantities like CQS, RGB,  $L^*a^*b^*$ , TLCI and TM-30 can be obtained using the PC software JETI LiVal (demo version see: [www.jeti.com](http://www.jeti.com)).



## Specifications

### Optical parameters

Spectral range	380 ... 780 nm 380 ... 1000 nm (version: spectraVal 1511NIR)
Optical bandwidth	4.5 nm 2 nm (version: spectraVal 1511HiRes) <sup>1</sup>
Wavelength resolution	1 nm
Digital electronic resolution	16 bit ADC
Viewing angle	1.8°
Measuring distance/ diameter	20 cm – Ø 6 mm; 100 cm – Ø 31 mm

### Measuring values

With optional diffusor

Spectral Radiance, Luminance, total Radiance  
x,y, u',v', CCT, color purity, CRI, RGB and others  
Spectral Irradiance/ Integral Irradiance/ Illuminance

### Measuring ranges and accuracies

Luminance measuring range	0.2 ... 180 000 cd/m <sup>2</sup> (Illuminant A) 0.2 ... 140 000 cd/m <sup>2</sup> (typical warm white LED)
Luminance accuracy	± 4.4 % (Illuminant A @ 100 cd/m <sup>2</sup> , k=2)
Luminance repeatability	± 1 % (Illuminant A)
Chromaticity accuracy	± 0.002 x, y (Illuminant A, k=2)
Color repeatability	± 0.0005 x, y (Illuminant A)
CCT repeatability	± 20 K (Illuminant A)
Max. wavelength error	± 0.2 nm (HgAr line source) (± 0.3 nm with spectraVal 1511HiRes)
Polarization error f <sub>8</sub>	< 2 %

### Other technical data

Dispersive element	Imaging grating (flat field)
Light receiving element	CCD line array 2048 pixels (binned) (4096 pixels on spectraVal 1511HiRes)
Power supply	Battery and USB powered
Interfaces	USB 2.0 fullspeed Bluetooth
Dimensions	140 mm x 115 mm x 70 mm
Weight	500 g
Operating conditions	Temperature 10 ... 40 °C Humidity < 85 % relative humidity at 35 °C
Accessories (included)	PC software JETI LiVal for Windows 8.1/ 10, operating instructions and software development kit on BT stick USB cable, battery charger and trigger connector Calibration certificate Tripod, carrying bag
Calibration	NIST traceable
Recommended interval	1 year



鑫立強科技有限公司 COLORPRO GROUP LIMITED

新北市汐止區新台五路一段77號14樓之7

TEL : 886 2 26983372 , 886 2 26983373 FAX : 886 2 26983678

<http://www.shincolorpro.com> E-mail: [color.pro@msa.hinet.net](mailto:color.pro@msa.hinet.net)